



3060 ShowerTub™ Shower Floor

Premium Fiberglass · Fits 30" x 60" Bathtub Alcoves · Low Step-In Convenience



Easy entry... that's what Mustee's walk-in ShowerTub™ shower floor can create when replacing an existing 30" x 60" bathtub or building new. Also creates 35% more shower space than a traditional one-piece tub/shower bathtub.


Complete an elegant look using the products listed on the reverse side of this sheet.

Features:


- Premium fiberglass construction
- Easy entry, 4 1/2" threshold
- Designed to fit standard 30" by 60" bathtub alcove
- Drain hole is offset 8 1/2" x 15" for connection to 2" DWV piping
- Semi-gloss and colorfast white & bone – mold & mildew resistant
- Slip-resistant Starburst® surface
- Available in both LH and RH drain locations
- Designed for use with Mustee shower walls, tile or other
- See Mustee's STYLEMATE® by-pass shower door
- Fits drain for 2" Iron DWV, (Sch. 40) PVC or ABS sanitary drain pipe
- Optional drain kit is available for connecting to existing 1 1/2" bathtub DWV line

Specifications

Sectional View

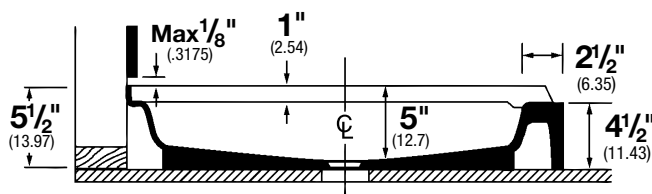

Top View

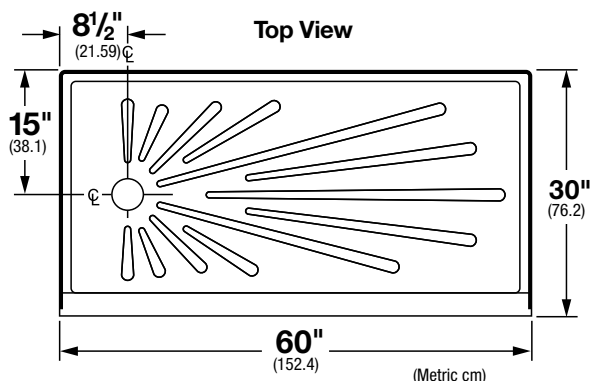




ShowerTub™ Shower Floor — 30" x 60"

Model	Color	Drain Location	Model	Color	Drain Location
3060L	White	Left Hand	3060R	White	Right Hand
3060LBN	Bone	Left Hand	3060RBN	Bone	Right Hand

General: Furnish and install as shown on plans, ShowerTub™ model ____ as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, using matched metal molds under extreme heat and pressure. Surface to be slip-resistant design that does not interfere with flow of water. Size: 30" x 60". Flood level rim will not be less than 3" high. Tiling flange will extend not less than 1" higher than the threshold which is an integral molded water barrier. Threshold will be 4 1/2" high. Drain hole offset 8 1/2" by 15" to accept drain kit for 2" PVC, ABS or iron DWV pipe, available left or right hand. Color ____ (White, Bone).

Complies with Specifications:

- IAPMO Listed® 
- American Society of Testing and Materials (ASTM): D 635  Flammability; E-84 Flame Spread; E-162 Fire Retardancy
- American National Standards Institute (ANSI): Z 124.1.2 
- Inhalation Toxicity Test



Companion Products



**760T-30WHT DURAWALL®
Fiberglass Shower Walls** —
5 piece wall system with an
embossed tile pattern on back
& side panels. Mounts direct-to-
studs.

760T-30WHT - White



**572T VARISTONE®— Fiberglass
Shower Walls** — Deluxe 5 piece
wall system with an embossed
tile pattern on all panels.
Adhesive mounts to drywall or
like surfaces.

**572TWHT - White
572TBN - Bone**



**260 DURAWALL®
Thermoplastic Shower Walls**
— 5-piece, wall system with
four integral shelves. Adhesive
mounts to drywall or like
surfaces.

**260WHT - White
260BN - Bone**



**265 DURAWALL®
Thermoplastic Shower Walls**
— 5-piece wall system with
smooth walls. Adhesive mounts
to drywall or like surfaces.

265WHT - White



572T VARISTONE®— Shelves — 12" wide, adhesive mount wherever desired. Can be used with any of the Mustee shower walls featured above.

572.300 - White

572.300BN - Bone



STYLEMATE® By-pass Enclosure — attractive, durable and easy to install, fits 59" opening. Features clear tempered safety glass panels and sturdy aluminum frame. Height 69".

Framed Design

60.403 - Chrome

60.404 - Brushed Nickel

60.405 - Oil-Rubbed Bronze

Frameless Design

60.406 - Chrome

60.407 - Brushed Nickel

60.408 - Oil-Rubbed Bronze




Fold-Down Shower Seats — 26" wide, strong, durable, made of 18-gauge stainless-steel tubing, satin finish. Comfortably padded white seats.

390.401 - Right Side

390.402 - Left Side



390.303 Safety Grab Bar — L-shaped, 20" x 42" with concealed-flange, 18-gauge 1 1/2" diameter stainless steel tubing, satin finish.



Drain Kit for 1 1/2" Tub Waste — the quick and convenient way to replace previous tub waste and connect ShowerTub™ to existing drain pipe.

60.300A - White

60.300ABN - Bone

42.317A Drain — PVC with seal, for 2" iron, PVC or ABS pipe.